





Oilless Rocking Piston Unit to 1.52 cfm **LAA Series**

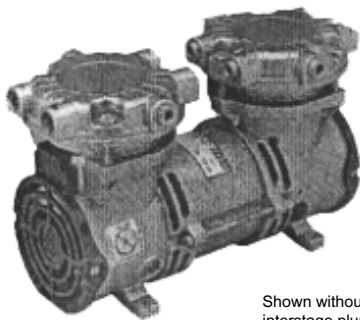

Shown without interstage plumbing

Product Dimensions (mm) (Inches)

Note: Staged vacuum version shown here, capacitor unattached.

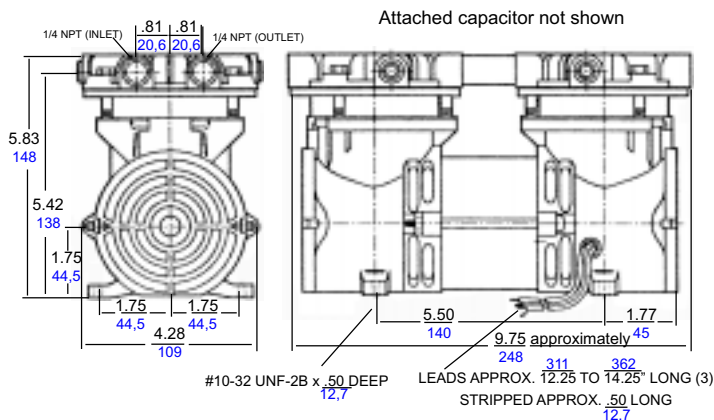

Performance at 60 Hz unless otherwise noted

MOTOR	MAXIMUM PRESSURE (PSI)	MAXIMUM VACUUM (IN. HG)	MAXIMUM OPEN FLOW (CFM)
PSC 4 Pole	100	29*	1.52

*staged version

PRODUCT FEATURES

- Oilless Operation
- Motor Mounted
- Rugged construction / low maintenance
- Low noise levels

INCLUDES

- Capacitor AH364

RECOMMENDED ACCESSORIES

- Muffler/filters AH190
- Pressure gauge AF583 / Vacuum gauge AA640
- Pressure relief valve AF592S / Vacuum relief valve AA207
- (4) Rubber feet AF584A
- Repair Kits: K767, K773 (LAA-101-NQ, LAA-V103-NQ, LAA-P112-NQ) K483 (LAA-V104-NQ)

Product Specifications

Note: "P" models are pressure, "V" models are vacuum; 101 model is vacuum or pressure

Model Number	Motor	RPM		HP	kW	Net Wt.	
		60 cycle	50 cycle			lbs.	kg
LAA-101-NQ	100-60/50-1;115-60-1	1575	1275	1/6	0,12	11.3	5,1
LAA-P112-NQ	100-60/50-1;115-60-1	1575	1275	1/6	0,12	11.3	5,1
LAA-V103-NQ**	100-60/50-1;115-60-1	1575	1275	1/6	0,12	11.3	5,1
LAA-V104-NQ*	100-60/50-1;115-60-1	1575	1275	1/6	0,12	11.3	5,1

**Parallel

* Staged

Product Performance (Metric, U.S.)

